

15" LCD Industrial Panel PC


IPPC-150D-2R

Features

- 15" XGA TFT LCD Panel support 1024 × 768pixels
- Intel Atom D525 (Dual-core 1.8GHz processor) CPU with 667 MHz FSB
- Front 6mm aluminum bezel with IP65 compliant
- Front hardness glass protect screen (touch option)
- 4 * COM, 1* LPT, 2 * PS/2, 1 * VGA, 4 * USB, 2* GLAN, 1* AUDIO, 1* MIC
- 1 * PCI Slot, 1* Mini PCIe slot,
- Wireless LAN with antenna (option)
- Panel (Flush) mount with clips
- Standard VESA 75mm support stand ,wall mount and swing arm



Design Drawings

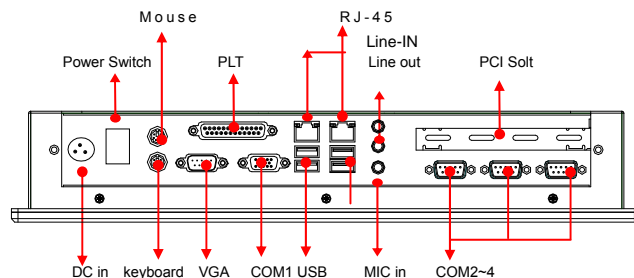

Specifications

TFT characteristics

Display Type	: 15 XGA TFT LCD
Screen resolution (Pixels)	: 1024 * 768
Brightness	: 350cd/m2
Contrast Ratio	: 700 : 1
Pixel Size	: 0.297*0.297
Max Color	: 16.2MB
Viewing angle	: 150° (H) , 135° (V)
Response Time	: 8 ms
LCD MTBF	: 50,000hrs

Available Options

Touch Screen	: Resistive
Wireless LAN	: Meet IEEE802.11b/g standard

I/O Connectors

1 x PS2 for KB / Mouse
2x 100/1000LAN port (RJ-45)
1 x VGA
4 x USB
4 x RS-232,COM2,RS232/RS422/RS485
1XLin-IN/Lin-OUT/MIC-in
1 x power switch
1 x DC input connector

System Characteristics

Processor	: Intel Atom D525 (Dual-core 1.8GHz processor) CPU with 667 MHz FSB
Chipset	: Intel NM10
Memory	: 2x SODIMM DDR3 800/1066/1333 SDRAM up to 4 GB
Graphic	: Intel GMA3150 chipset
Storage	: Space for 1x 2.5" SATA HDD
Ethernet	: 100/1000 Ethernet
VGA port	: 1 x VGA Connector
KB & Mouse	: 1 x PS2 port
Audio	: Realtek @ ALC662, 5.1 channel surround audio
USB Port	: 4 x USB 2.0
Serial Port	: 4 x RS-232,COM2,RS232/RS422/RS485
Expansive Slot	: 1 x Mini PCIe and 1 x PCI

Mechanical and Environmental

Construction	: Front aluminum bezel and steel enclosure
Operating temperature	: 32 °F~113 °F (0 °C to 45°C)
Storage temperature	: -4 °F~140 °F (-20 °C to 60 °C)
Storage humidity	: 10% to 90% non-condensing
Vibration	: 17 to 500HZ 1G PTP
Shock	: 1G /peak (11m sec)
Dimensions (WXHXD)	: 406X312X76 (mm)
Weight	: Net: Kg, Gross: kg

15" LCD Industrial Panel PC

IPPC-150D-2R

Power Specifications

Input : 100~240VAC,50/60Hz

Output : DC12V@ 10A/ 120W ,external ac adapter with lockable connector

Certification and Approvals


• CE/ROHS

Ordering Information

IPPC-150D-2R : 15" XGA Slim Line Panel Mount Industrial Panel PC support Intel Atom D525 Dual-core 1.8GHz Processor, with 2G RA M, 2.5" 320G HDD.

IPPC-150DT-2R : 15" XGA Slim Line Panel Mount Industrial Panel PC support Intel Atom D525 Dual-core 1.8GHz Processor, with 2G RAM, 2.5" 320G HDD.
with Resistive Touch Screen

Design Drawings

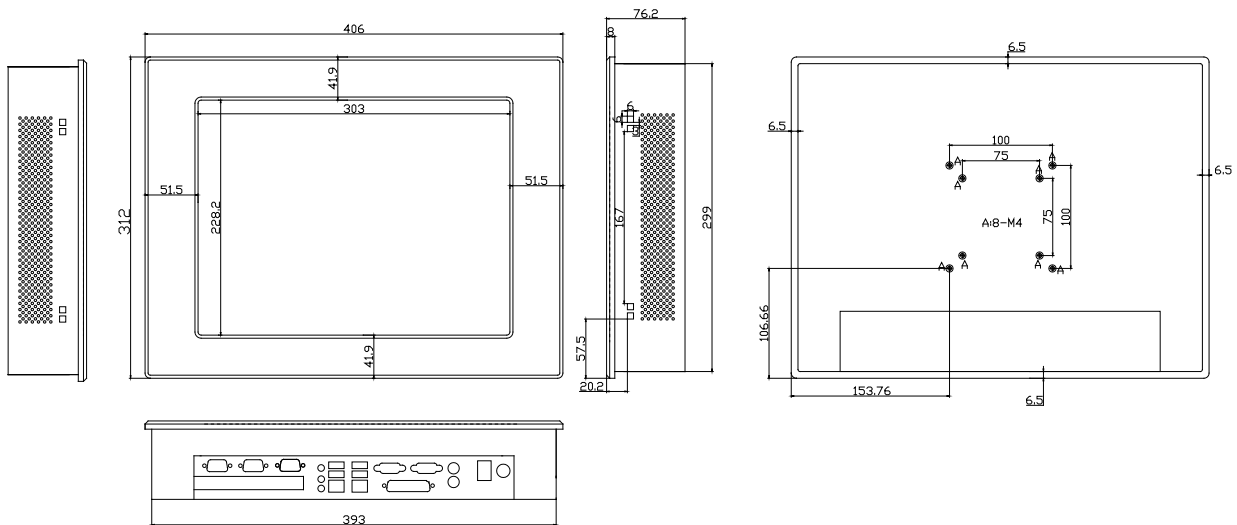

* Unit : mm